Liebert Intellislot® 485 Card With Adapter

Quick Start Guide

1 INSTALL

- Locate the adapter mounting location in your Liebert equipment.
- Secure the Intellislot 485 Card with Adapter with the supplied screws.
- Connect the equipment's communication cable to the TB1 terminal block or P1 on the card (See equipment user manual for details).
- Connect a Modbus (RS-485) cable to the TB2 terminal block.
- Connect an input power supply cable to Pins 1 & 2 on the TB3 terminal block; Pin 1 is at the far left, and Pin 2 is the middle pin.

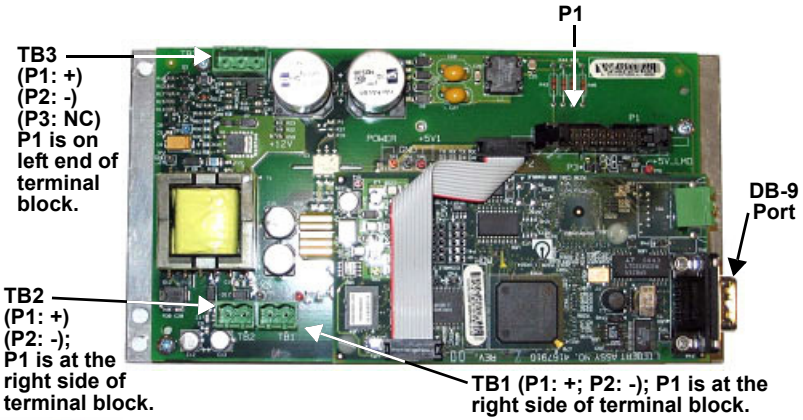

2 CONNECT THE CABLE

- Locate the blue serial configuration cable (null modem) that shipped with the card.
- Connect the configuration cable to the DB-9 port on the card and to a COM port on your PC.

3 CONFIGURE THE CARD

- Use terminal emulation software, such as HyperTerminal™, to open a direct connection to the card. Use the data at right to configure the emulation software.
- Press **Enter** for the **Main Menu**.
- Select the option for **485 Network Settings** and press **Enter** to access the communications settings.
- Enter **1** and press **Enter**.
- Select **Modbus Server** to enable the Modbus application.
- At the next screen, enter **3** to access the screen to set the **Server ID** (the ID default is 1, but may be any number up to 255).
- Press **Esc** to return to the Main Menu.
- Enter **X** and press **Enter** to exit HyperTerminal, save your changes and reboot the card.

Emulation Software Configuration

Baud Rate:	9600
Data Bits:	8
Parity:	None
Stop Bits:	1
Flow Control:	None

User Manual

This Quick Start Guide is designed to give you the information you need to install and configure the Liebert Intellislot 485 Card with Adapter. Liebert highly recommends that new users consult the user manual, SL-52615, available online at **www.liebert.com**.

Modbus™ Support

Building Management Systems play a vital role in the overall operations of facilities and buildings. Most building management systems provide device communications via the Modbus protocol. The IntelliSlot 485 card with adapter provides a Modbus interface to Liebert equipment, enabling integration with your building management system.

Product details are available online at **www.liebert.com**

The Company Behind the Products

With over a million installations around the globe, Liebert is the world leader in computer protection systems. Since its founding in 1965, Liebert has developed a complete range of support and protection systems for sensitive electronics.

While every precaution has been taken to ensure the accuracy and completeness of this literature, Liebert Corporation assumes no responsibility and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2007 Liebert Corporation
All rights reserved throughout the world. Specifications subject to change without notice.

® Liebert and the Liebert logo are registered trademarks of Liebert Corporation. All names referred to are trademarks or registered trademarks of their respective owners.

Technical Support/Service

Web Site
www.liebert.com

Monitoring
800-222-5877
monitoring@emersonnetworkpower.com
Outside the North America:
+00800 1155 4499

Locations

United States
1050 Dearborn Drive
P.O. Box 29186
Columbus, OH 43229

Locations

Europe
Via Leonardo Da Vinci 8
Zona Industriale Tognana
35028 Piove Di Sacco (PD) Italy
+39 049 9719 111
Fax: +39 049 5841 257

Asia
29/F, The Orient Square Building
F. Ortigas Jr. Road, Ortigas Center
Pasig City 1605
Philippines
+63 2 687 6615
Fax: +63 2 730 9572

SL-29108_REV1_08-14

EMERSON
Network Power